




Holey Board

Premium Expanded Polystyrene (EPS) Foam Insulation

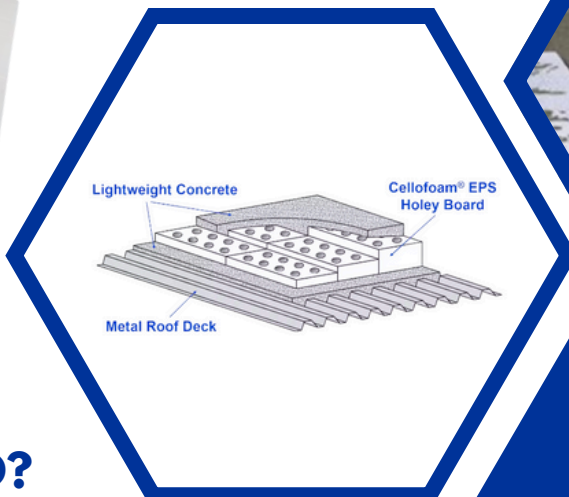

APPLICATIONS

- Installed on a roof as part of a lightweight insulating concrete roof deck system
- Made of a rigid, closed-cell EPS foam with fire retardant
- Cut with hole patterns to meet the LWIC roofing system specification and project requirements

WHY HOLEY BOARD?


- Lightweight & easy to handle and apply
- Added R-value = Excellent thermal savings per dollar cost, creating energy efficiency
- EPS R-value does not degrade over decades of use (unlike Polyiso or XPS)
- Minimal weight addition to structures & suitable for a variety of roof types
- Moisture and mold resistant due to EPS closed-cell structure
- EPS contains no formaldehyde or ozone-depleting CFCs or HCFCs

Sizes

- Density (pcf): 1.0V, 1.0RC, 1.25V, 1.25RC, [1.5V* & 2.0V*]
- Width: 24", 48"
- Length: 48", 96"
- Thickness: 1" - 16" (1/2 Increments)

*Requires LWIC System approval

*Reach out to your Cellofoam® sales representative for certain size availability

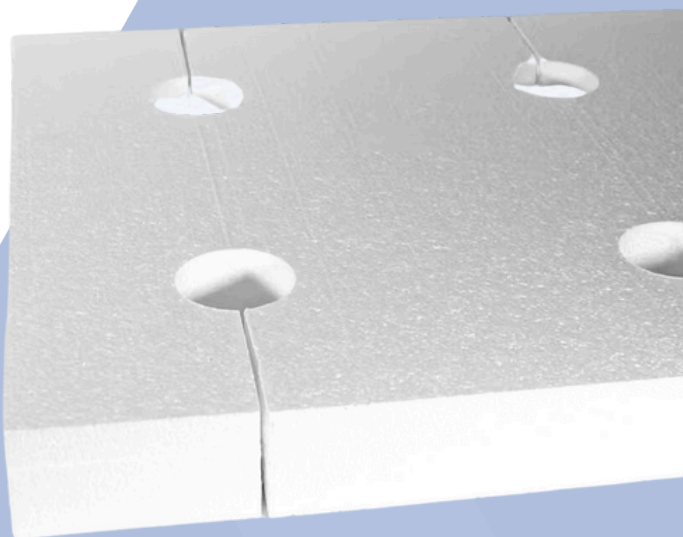



Holey Board

Premium Expanded Polystyrene (EPS) Foam Insulation

CODE APPROVALS

- Meets or exceeds **ASTM C578**

EXPANDED POLYSTYRENE TYPICAL PHYSICAL PROPERTIES

Cellofoam® EPS Typical 1 Physical Properties		Units	ASTM Test	Type I	ASTM C578 Type		
					Type VIII	Type II	Type IX
Density (Nominal)		lb/ft³	C303 or D1622	1.0	1.25	1.5	2.0
Density (Minimum)		lb/ft³		0.90	1.15	1.35	1.80
Thermal Resistance							
R-Value²	at 25 °F	(°F ft² hr) / Btu per inch	C177 or C518	4.35	4.54	4.76	5.00
	at 40 °F			4.17	4.25	4.55	4.76
	at 75 °F			3.85	3.92	4.17	4.35
Compressive Strength at 10% deformation		psi	D1621	10 - 14	13 - 18	15 - 21	25 - 33
Flexural Strength		psi	C203	25 - 30	30 - 38	40 - 50	50 - 75
Water Vapor Permeance 1.0 in. thickness		perm.	E96	2.0 - 3.0	1.5 - 2.8	0.9 - 2.5	0.6 - 1.5
Water Absorption by total immersion		volume %	C272 or C1763	< 1.5	< 1.5	< 1.5	< 1.5
Capillarity		--	--	none	none	none	none
Dimensional Stability maximum		change %	D2126	< 0.5	< 0.5	< 0.5	< 0.5
Coefficient of Thermal Expansion		in/(in °F)	D696	0.000035	0.000035	0.000035	0.000035
Fungus & Bacterial Resistance		-	C1338	Will not support bacterial or fungus growth; no food value			
1 Typical physical properties are based on data provided by resin manufacturer, independent test agencies, and Cellofoam North America Inc. All data is for plain, unlaminated EPS foam.							
2 R means resistance to heat flow. The higher the R value, the greater the insulating power.							

*Please consult local building codes and membrane manufacturers for system requirements.

Warning: This product is combustible and if exposed to a fire of sufficient heat and intensity may burn rapidly. It should not be left exposed or inadequately protected. Protect Cellofoam® expanded polystyrene from exposure to hydrocarbons, coal tar pitch, solvents, and solvent fumes. Consult specific instructions and applicable building codes for use of this product.

Cellofoam® North America Inc. is an expanded polystyrene foam manufacturer and not an engineering consulting firm. Thus, it is beyond our scope to provide design services on the specific use for our products. Users of our EIFS EPS products should consult with appropriate engineering and code experts to determine the exact type and specifications of EPS required for their project. The sale of these products shall be subject to Terms and Conditions of Sale, including those limiting warranties as set forth in Cellofoam®'s invoices. No agent, employee, or representative of Cellofoam® North America Inc. or its subsidiary or affiliated companies is authorized to modify this disclaimer.